

**PUD NO. 1 OF SKAGIT COUNTY
PIPELINE RELOCATION AT CEDARDALE ROAD PROJECT**

ADDENDUM NO. 1

Date of Issue: March 14, 2025

To All Planholders and/or Prospective Bidders:

The time and place of bidding remains unchanged as 11:00 AM, Tuesday, March 25, 2025, at Public Utility District No. 1 of Skagit County.

Acknowledge receipt of this Addendum in the space provided in the BID FORM. Failure to do so may subject the Bidder to disqualification.

The following changes, additions, and/or deletions are hereby made a part of the project bid documents for the Pipeline Relocation at Cedardale Road Project and shall have the same effect as if set forth therein.

A. GENERAL:

- a. A pre-bid meeting was held on March 11, 2025, at Skagit PUD, 1415 Freeway Drive. Meeting minutes and a list of attendees are attached to this addendum.
- b. A list of contractor questions and answers to date is attached to this addendum.

B. SPECIFICATIONS:

- a. Bid Schedule
 - i. Remove the existing Bid Schedule and insert the attached Revised Bid Schedule.

C. REVISIONS TO PLANS

- a. Remove and replace Sheet 4 of 5 of the plans. Revisions to the plan include the addition of asphalt patching and the PUD providing tie-in materials in accordance with the pre-bid meeting Q&A.

This Addendum consists of this one (1) cover page and seven (7) attached pages, for a total of **eight (8)**.



Mark Handzlik, P.E., Engineering Manager

Appended hereto and part of Addendum No. 1

- A. Meeting Minutes (2 pages)
- B. List of Attendees (2 pages)
- C. Questions and Answers (1 page)
- D. Revised Bid Schedule (1 page)
- E. Revised Planset (1 page)



Pipeline Relocation at Cedardale Road Project
Pre-Bid Meeting Minutes
March 11, 2025
10:00 AM

Engineering Technician Josh Brady called the Pre-Bid Meeting to order at 10:00 AM.

Engineer Brady introduced PUD staff including Mark Handzlik, P.E., Engineering Manager; Mark Semrau, P.E., Capital Projects Manager; Catherine Price, Contract Coordinator; Michelle Peters, Engineering Administrative Assistant; Tyler Scott, Maintenance Foreman; and Chris Smith, Capital Project Inspector.

Engineer Brady stated that the purpose of the pre-bid was to briefly go over the project and provide an opportunity for bidder questions/answers.

Engineer Brady gave a project description/overview as follows, installation of approximately 450 linear feet of 8-inch ductile iron water pipeline by traditional trenching methods in private easements, east of Cedardale Road, within the City of Mount Vernon, State of Washington. Work includes fittings, pressure and disinfection testing of the pipe, along with appurtenances and incidentals such as dewatering, temporary erosion control.

Engineer Brady reviewed the following anticipated schedule:

Question Cutoff: Thursday, March 20 at 12:00 PM

Bids Due: Tuesday, March 25 at 11:00 AM

Anticipated Award Date: Wednesday, April 9

Anticipated Notice to Proceed issued: May 5

Anticipated Start of Construction: May – June

All contract work shall be completed by June 30

Engineer Brady reviewed project constraints including that the work partially funded by a PUD Utility Relocation Grant administered by the Washington State Department of Commerce; therefore, the deadline for substantial completion of June 30, 2025 is critical; staging areas require signed permission from private property owners before and after; contractor to delineate easements prior to work; Skagit PUD will notify property owners prior to construction; and restoration of easements (fencing and 6-inches of gravel fill). There is a property that has heavy equipment coming and going from the area. Engineer Brady reviewed scheduling constraints PUD crew tie-ins (three-days' advance notice) and permits (WDFW HPA, City of Mount Vernon Critical Areas and Land Disturbance). PUD will supply all parts for tie-ins. The Contractor is responsible for excavation and restoration.

Engineer Brady reviewed some project details, bid schedule items are all lump sum, depth/elevation changes at the culvert, five feet of cover over concrete culvert which conveys Maddox Creek (there is an elevation change here), and note that District vs Contractor responsibility is delineated on plans.

Engineer Brady stated to use only the Bid Proposal form or Addendum Bid Proposal form to submit bids. All pages of the form must be submitted with bid unless specific addenda pages are issued. Restrained pipe fittings are to be included in the individual bid items in which they appear. If bid items or quantities are revised, a new Bid Proposal form will be issued.

Engineer Brady stated that PUD will provide materials testing for the project and the Contractor is responsible for construction staking.

Engineer Brady **Addendum No. 1** will be issued with questions/clarifications to date, (1) Table of Contents typo 01 11 00 Summary of Work is incorrectly numbered in the TOC, and (2) PUD supplies all materials and fitting for the “District” tie-in work.

Engineer Brady opened the meeting up to Questions/Clarifications:


- Who is responsible for testing? The Contractor is responsible for pressure and bacteriological testing according to PUD standard.
- Why is PUD doing this project? Fish passage project on Cedardale road is impacting our line. This project will be a bypass.
- Can we reuse material? If it can be removed clean and meets specifications, we are open to reusing material. However, our concern is the weight of the heavy equipment at the Barnhart site.
- Do we need to install HDPE conduit shown on the detail? No, there is no fiber on this project.

With no further business to discuss, Engineer Brady adjourned the pre-bid meeting at 10:09 AM.

Respectfully,
Catherine Price, Contract Coordinator

Pipeline Relocation at Cedardale Road
Pre-bid Meeting
March 11, 2025
10:00 AM

PRINT NAME	COMPANY	PHONE	E-MAIL
Catherine Price	PUD	360-424-7104	Price@SkagitPUD.org
Josh Brady	PUD	360-399-5274	Brady@SkagitPUD.org
Chris Smith	PUD	360-722-9521	Smith@SkagitPUD.org
Tyler Levi Nyberg	Highline Construction	360-319-9737	levi@highlinewa.com
KHALEN BRANTON	TRICO	360 333 8360	BIDSE@trico.companies.com
John Snyder	SRV	360-675-7100	John@SRVConstruction.com
Danny Dodge	Dodge Excavating	360-481-7470	DDodge2509@gmail.com
Sam KLOES	WRS	360-410-8191	Sam@WRSWEB.com
Cory Fagerlie	Puget Sound Tap	425-508-0531	PugetSoundTap@gmail.com
Waylon Winterborn	Raw Land Const	360-441-6197	info@rawlandconstruction.com
Jeff Brown	B&B utilities	206 406 0504	Jeff@bbutilities.com
MIKE BENTON	SKAGIT PUD	(360) 360 661-4056	BENTON@SKAGITPUD.ORG

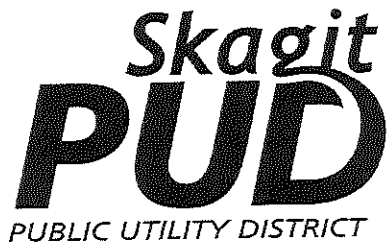

Pipeline Relocation at Cedardale Road
Pre-bid Meeting
March 11, 2025
10:00 AM

PRINT NAME	COMPANY	PHONE	E-MAIL
Mark Handtche	PUD	360 853 6305	
Michelle Peters	PUD	360 899-16175	
Tyler Scott	PUD		
Bill Treveman	PUD		
CAROL SMITH	PUD		
Kerry Ness	PUD		

Questions & Answers




Question	Response
There's an error on the TOC, it lists 011110 for the summary of work section, while the section itself is numbered 011100	01 11 00 Summary of Work, is correct. The TOC should be revised accordingly.
Furnished Materials: Will the "District" be furnishing the ductile iron fittings and pipe in the areas denoted on the "District" sectioned portion of the drawings or only performing the installation of "Contractor" furnished fittings and pipe in these two areas (near STA 06+00 and STA 10+33)?	The District will supply and install all materials for tie-ins.
Is a bid bond required for this project?	No.

REVISED BID SCHEDULE :					
PIPELINE REPLACEMENT AT CEDARDALE ROAD PROJECT					
Item No.	Bid Schedule Description	Estimated Quantity	Unit	Unit Price	Total
1.	Mobilization	1	LS	\$	\$
2.	Furnish and Install Adequate Site and Trench Systems in Accordance with RCW 49.17	1	LS	\$	\$
3.	Furnish and Install 8-inch Ductile Iron Pipe, CL 50, Including Trench Excavation, Backfill and Compaction	1	LS	\$	\$
4.	Connection Work for Tie-In at Station 10+27 and 6+13	2	LS	\$	\$
5.	Asphalt Restoration 600 sq-ft, 2-inches deep	1	LS	\$	\$
Sub-Total Base Bid				\$	
Sales Tax (8.8%)				\$	
Total Bid Amount				\$	

DOLLARS


Total Bid with Sales Tax (written in words)

- NOTES:
1. CONTRACTOR TO POTHOLE EX. TO ESTABLISH LINE AND GRADE FOR CONNECTIONS
 2. CONTRACTOR RESPONSIBLE FOR ALL EXCAVATION, SHORING, DEWATERING, TRAFFIC CONTROL, CONCRETE THRUST BLOCKING, BACKFILL, COMPACTION, AND SURFACE RESTORATION.
 3. CONTRACTOR TO USE DETAIL WT1-2 FOR TRENCH RESTORATION ON P29347 PROPERTY.

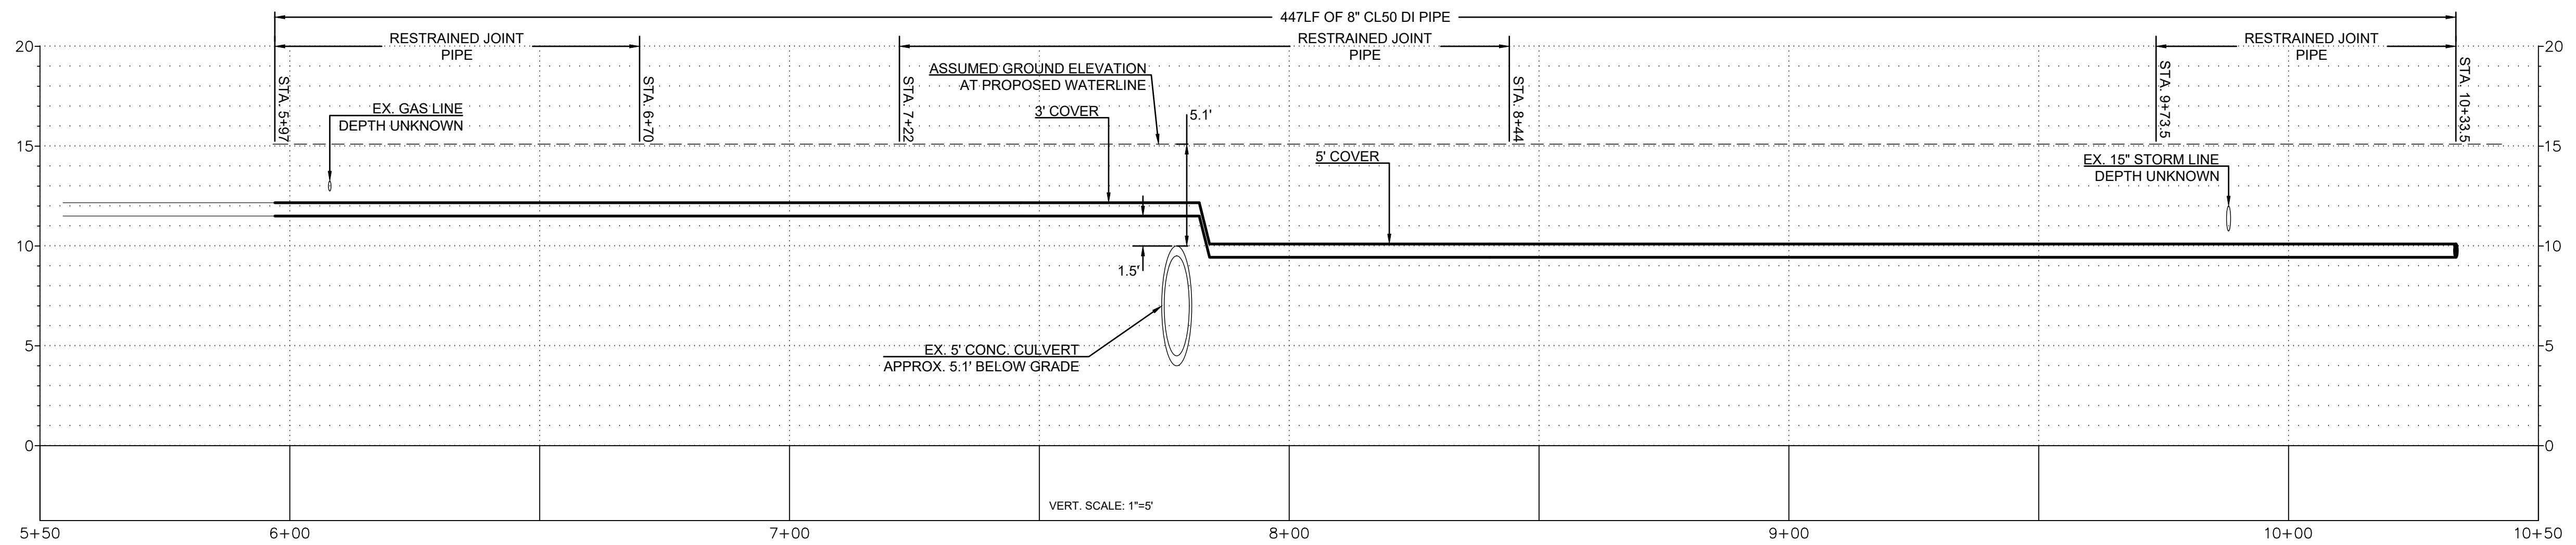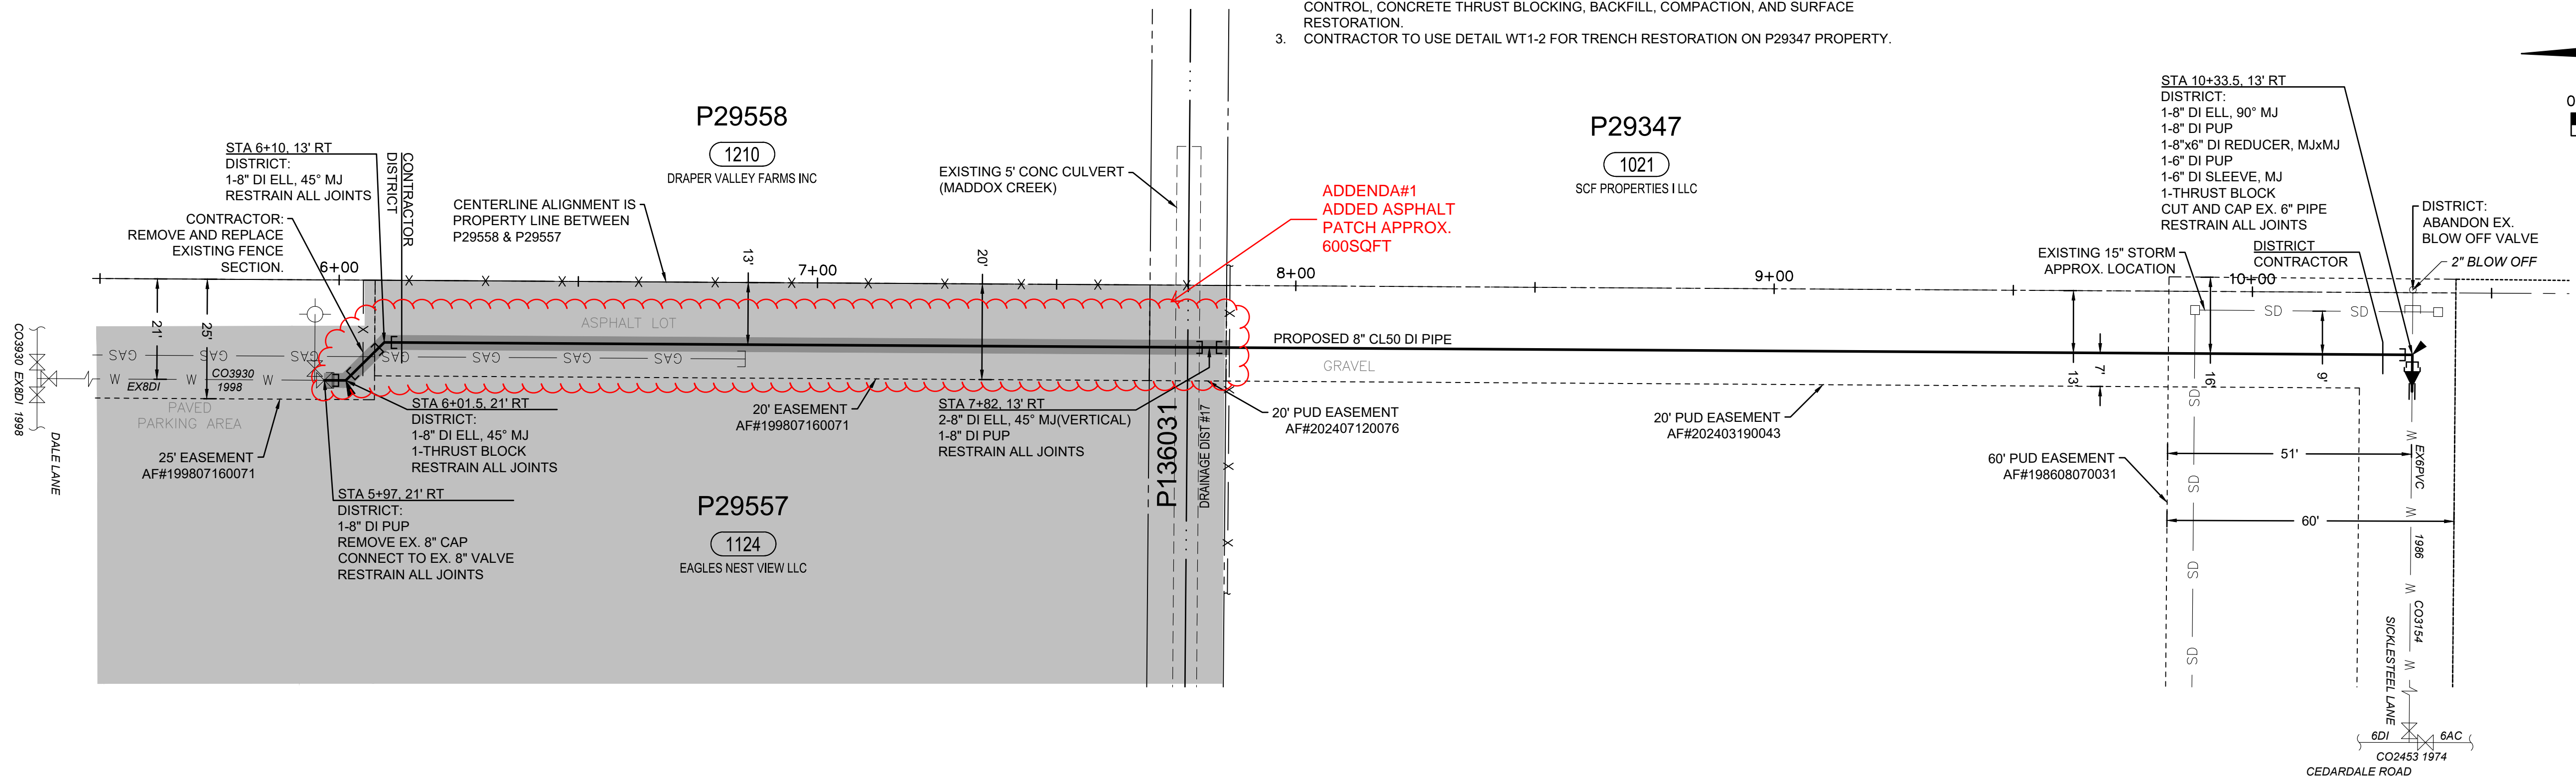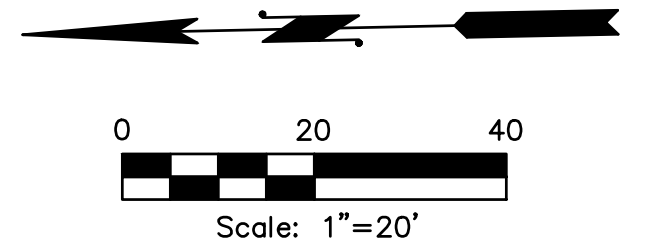

- SKAGIT PUD**
BILL OF MATERIAL TO BE SUPPLIED BY CONTRACTOR FOR PUD WORK
- 2-8" DI PUP
 - 1-6" DI SLEEVE, MJ
 - 2-6" MJ GLAND RESTRAINTS
 - 7-8" MJ GLAND RESTRAINTS
 - 1-BELL AND SPIGOT PIPE RESTRAINT
 - 2-8" DI 45° ELL, MJxMJ
 - 1-6" DI 90° ELL, MJxMJ
 - 1-8"x6" DI REDUCER, MJxMJ

ISSUE	REVISIONS	BY	DATE
1.	30% DESIGN	MCH	8/27/24
2.	ISSUED FOR BIDDING	MCH	3/14/25
3.	ADDENDA #1	MCH	3/14/25

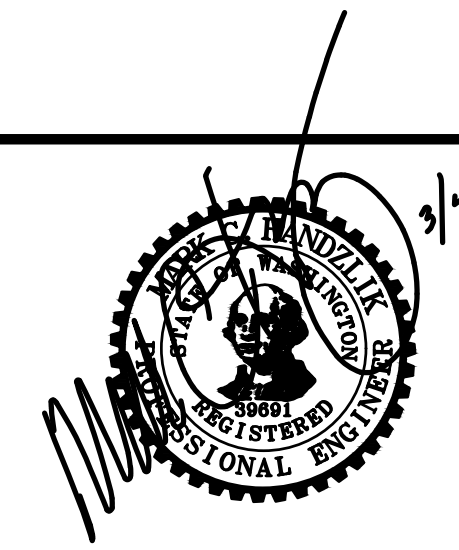

DATUM: HOR: NAD 83 VERT: ASSUMED	DSGN BY: JLB DWN BY: JLB APPVD BY: MCH
DATE PRINTED: 3/14/25	SEC: 30 TWP: 34 N RGE: 4 E

Skagit PUD
PUBLIC UTILITY DISTRICT
1415 Freeway Drive
P.O. BOX 1436
Mount Vernon, WA 98273
(360) 424-7104
www.SkagitPud.org

PIPELINE RELOCATION AT CEDARDALE
PLAN AND PROFILE
STA 6+50 TO STA 10+50
SCALE: 1"=20'
JOB ID: CP14019
SHEET: 4 OF 5